


N-Channel Logic Level Enhancement Mode Field Effect Transistor

Product Summary:

BV _{DSS}	100V
R _{DS(on)} (MAX.)	8.0mΩ
I _D	72A



UIS, R_g 100% Tested

Pb-Free Lead Plating & Halogen Free



ABSOLUTE MAXIMUM RATINGS (T_A = 25 °C Unless Otherwise Noted)

PARAMETERS/TEST CONDITIONS		SYMBOL	LIMITS	UNIT
Gate-Source Voltage		V _{GS}	±20	V
Continuous Drain Current	T _C = 25 °C	I _D	72	A
	T _C = 100 °C		45	
Pulsed Drain Current ¹		I _{DM}	160	
Avalanche Current		I _{AS}	15	mJ
Avalanche Energy	L = 0.1mH, I _{AS} = 15A, R _G = 25Ω	E _{AS}	11.2	
Repetitive Avalanche Energy ²	L = 0.05mH	E _{AR}	5.6	
Power Dissipation	T _C = 25 °C	P _D	69	W
	T _C = 100 °C		27	
Operating Junction & Storage Temperature Range		T _j , T _{stg}	-55 to 150	°C

THERMAL RESISTANCE RATINGS

THERMAL RESISTANCE	SYMBOL	TYPICAL	MAXIMUM	UNIT
Junction-to-Case	R _{θJC}		1.8	°C / W
Junction-to-Ambient	R _{θJA}		62	

¹Pulse width limited by maximum junction temperature.

²Duty cycle ≤ 1%

ELECTRICAL CHARACTERISTICS (T_J = 25 °C, Unless Otherwise Noted)

PARAMETER	SYMBOL	TEST CONDITIONS	LIMITS			UNIT
			MIN	TYP	MAX	
STATIC						
Drain-Source Breakdown Voltage	V _{(BR)DSS}	V _{GS} = 0V, I _D = 250μA	100			V
Gate Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = 250μA	1.0	2.0	3.0	
Gate-Body Leakage	I _{GSS}	V _{DS} = 0V, V _{GS} = ±12V			±100	nA
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = 80V, V _{GS} = 0V			1	μA
		V _{DS} = 70V, V _{GS} = 0V, T _J = 125 °C			25	
On-State Drain Current ¹	I _{D(ON)}	V _{DS} = 5V, V _{GS} = 10V	72			A
Drain-Source On-State Resistance ¹	R _{DS(ON)}	V _{GS} = 10V, I _D = 24A		6.7	8.0	mΩ
		V _{GS} = 4.5V, I _D = 20A		8.0	10.5	
Forward Transconductance ¹	g _{fs}	V _{DS} = 5V, I _D = 24A		70		S
DYNAMIC						
Input Capacitance	C _{iss}	V _{GS} = 0V, V _{DS} = 50V, f = 1MHz		4430		pF
Output Capacitance	C _{oss}			744		
Reverse Transfer Capacitance	C _{rss}			108		
Gate Resistance	R _g	V _{GS} = 15mV, V _{DS} = 0V, f = 1MHz		1.0		Ω
Total Gate Charge ^{1,2}	Q _g (V _{GS} =10V)	V _{DS} = 50V, V _{GS} = 10V, I _D = 24A		78		nC
	Q _g (V _{GS} =4.5V)			44		
Gate-Source Charge ^{1,2}	Q _{gs}			13		
Gate-Drain Charge ^{1,2}	Q _{gd}			23		
Turn-On Delay Time ^{1,2}	t _{d(on)}	V _{DS} = 50V, I _D = 24A, V _{GS} = 10V, R _{GS} = 6Ω		10		nS
Rise Time ^{1,2}	t _r			15		
Turn-Off Delay Time ^{1,2}	t _{d(off)}			32		
Fall Time ^{1,2}	t _f			20		
SOURCE-DRAIN DIODE RATINGS AND CHARACTERISTICS (T _c = 25 °C)						
Continuous Current	I _S				72	A
Pulsed Current ³	I _{SM}				160	
Forward Voltage ¹	V _{SD}	I _F = 24A, V _{GS} = 0V			1.2	V
Reverse Recovery Time	t _{rr}	I _F = 24A, dI _F /dt = 100A / μS		47		nS
Reverse Recovery Charge	Q _{rr}			226		nC


¹Pulse test : Pulse Width ≤ 300 μsec, Duty Cycle ≤ 2%.

²Independent of operating temperature.


³Pulse width limited by maximum junction temperature.

Ordering & Marking Information:

Device Name: LB85N10E for IPAK (TO-251)

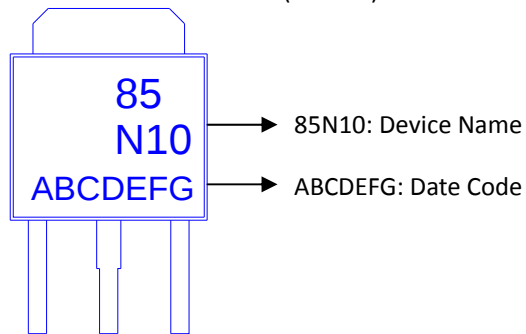

Outline Drawing

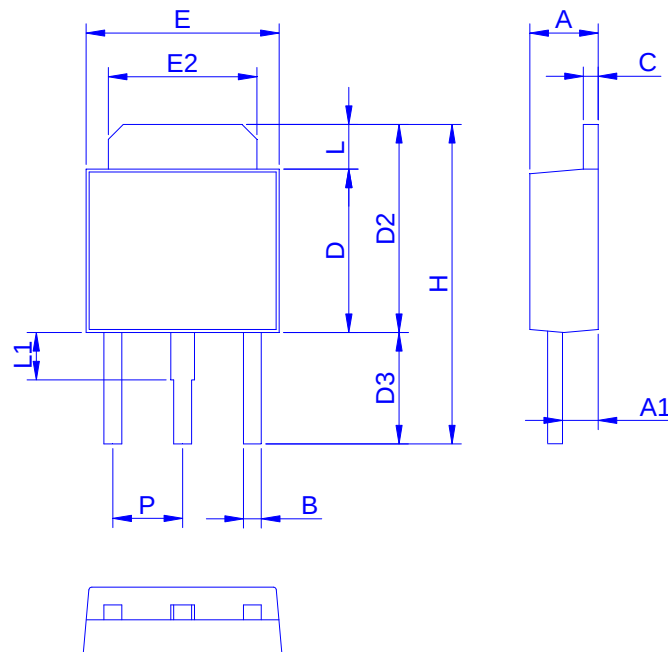

Dimension in mm

Dimension	A	A1	B	C	D	D2	D3	E	E2	H	L	L1	P
Min.	2.10	0.86	0.40	0.40	5.30	6.70	3.30	6.30	4.80	10.2	0.89	0.90	2.10
Max.	2.50	1.50	0.90	0.60	6.25	7.30	4.30	6.80	5.50	11.5	1.40	1.80	2.50

TYPICAL CHARACTERISTICS

